



## HANDLE-IT® SA Series

Model 600  
Model 800  
Model 800XHT  
Model 850PS

### **Model 850PS XHT**

Model 1100AC  
Model 1200UL



Part Number: SWM-SA-850PS XHT



### Full Set of Functions & Options

**250% Power Pre-Stretch Carriage**

**98" max wrap height!**

**100 max average pallets per day!**

### Technical Specifications

Wrap Height	98"
Turntable Diameter	59"
Max Pallet Size	48" x 80" (93" Diagonal)
Turntable Height	3"
Weight Capacity	4,400 lbs
Pre-Stretch	250% Powered
Power Supply	110V, 10 Amp
Total Machine Footprint	93" long x 60" wide
Machine Weight	600 lbs
Turntable Speed	13 RPM

## Handle-It® Model 850PS XHT

The Handle-It® Model 850PS XHT offers top-of-the-line functions and features at a great price. It is ideal for those who are looking for an efficient machine capable of handling high volumes of pallets per day.

Standard features on the 850PS XHT include 250% powered pre-stretch, 98" max wrap height, user-friendly control panel, electronic film tension, and many other elements cleverly designed to make this unit a must-have in any facility looking to improve and streamline their packaging operations.

# HANDLE-IT®

## Semi-Automatic Stretch Wrapper

### Model 850PS XHT


#### Product Specifications

- Electronic printed circuit board for the management of the cycle
- Frequency controller for turntable speed adjustment (from 3 to 12 RpM)
- Frequency controller for carriage speed adjustment (speed going up and speed going down can be set differently)
- Turntable size 60"
- Maximum wrapping height: 98" on XHT
- Maximum size of the pallet: 48" x 80" (93" Diagonal)
- Maximum loading weight: 4400lbs
- Electromagnetic brake for film stretching
- Photocell for pallet height detection
- Safety stop at the base of the carriage
- Stop at 0 position
- Power board IP54
- 4 digits display
- 2 access keys (including lock mode)
- Adjustable parameters by the control panel: cycle selection, bottom turns, top turns, rotation
- Speed, carriage speed going up, carriage speed going down, film tension.
- Many parameters available at upper password level
- Reinforcing operation
- 3 working cycles: ascent/descent; topsheet; only ascent
- 9 programs can be saved by the customer
- 9 additional recordable playback cycles can be saved



#### Available Options

- Integrated Scale
- Loading Ramp
- Top Press
- Photocell for Dark Loads
- Cold Environment Kit

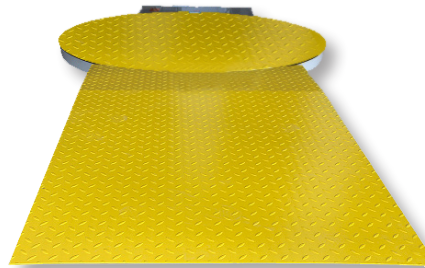

Intuitive Control Board